Ultra Products
8300 West Flagler St.
Suite# 121-106
Miami, FL 33144


Customer Service: 1(800)830-0051
www.ultraproducts.com



User's Manual
Le Manuel D'Utilisateur


Installation

Package Contents

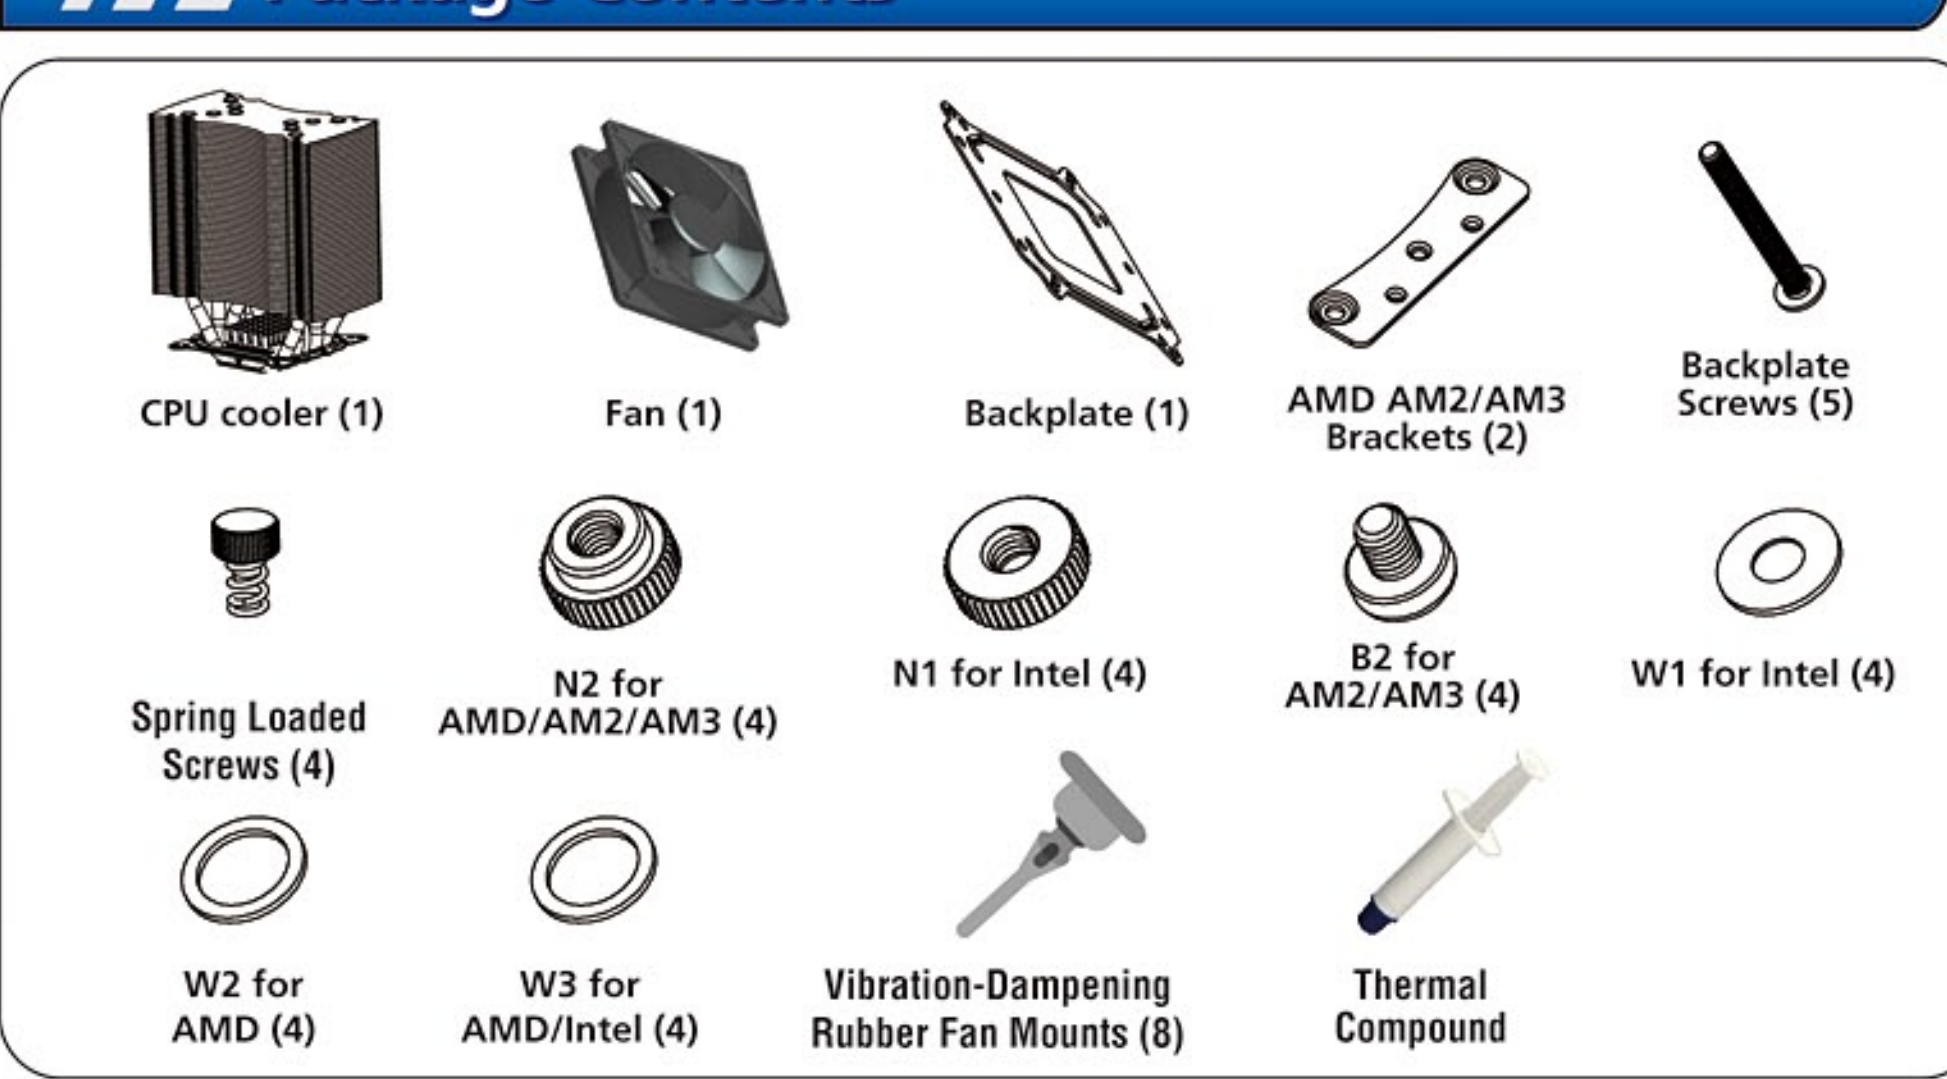

Pre-Installation

Backplate

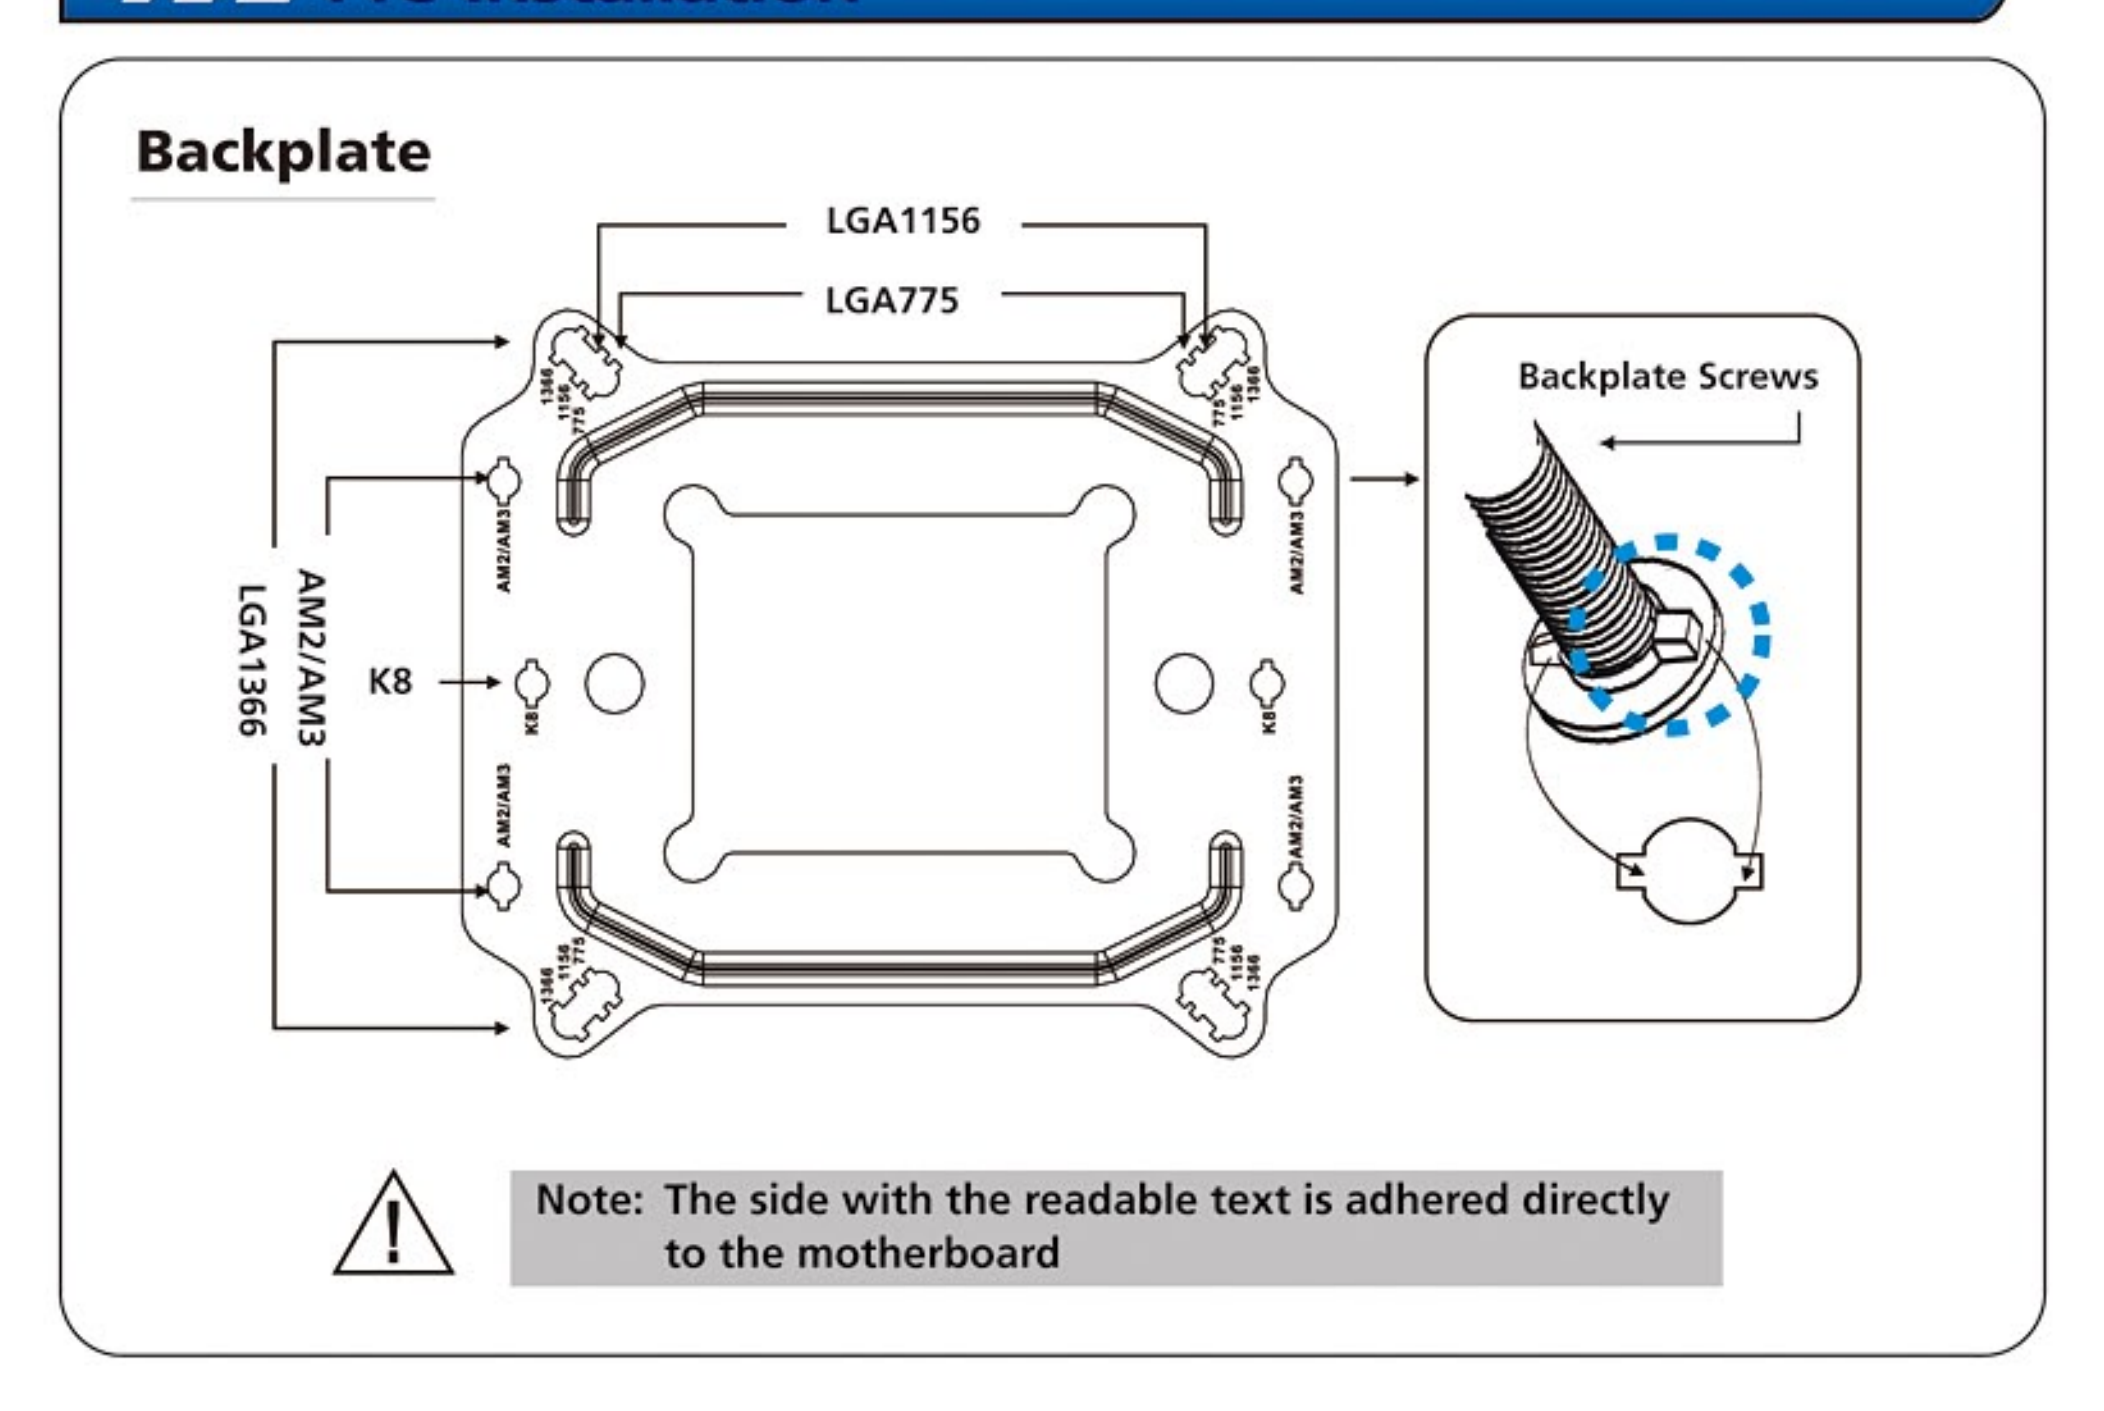


Note: The side with the readable text is adhered directly to the motherboard

Intel Installation (Sockets LGA 775/1156/1366)

Take note of the appropriate screw holes needed for mounting your specific socket as illustrated below.

Mount the backplate screws (N1) making sure the insulation pads (W1) are placed in between the screws and the motherboard.

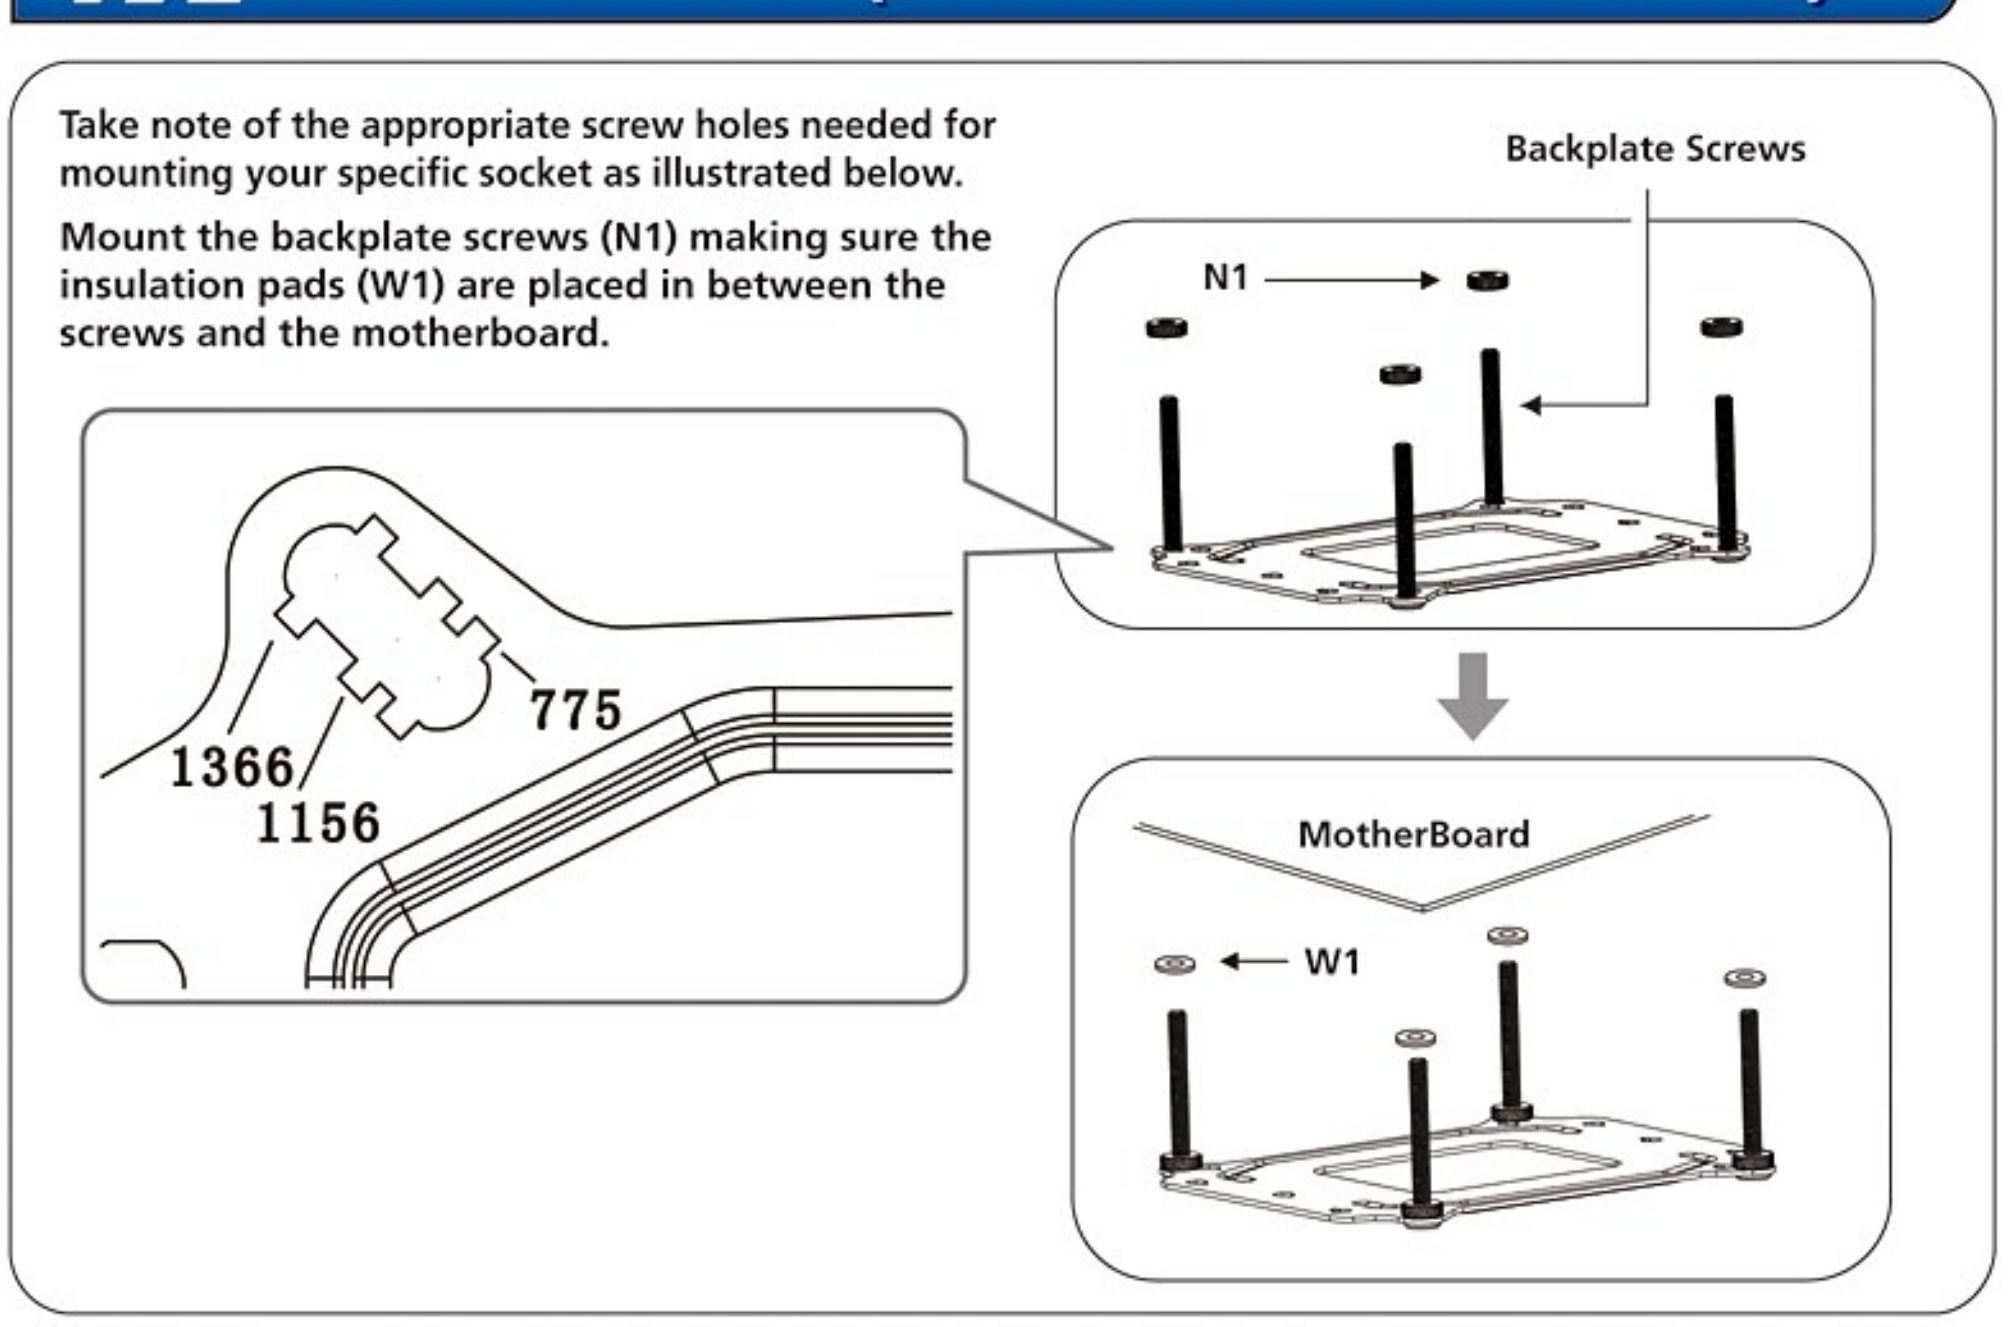

AMD Installation (Sockets AM2/AM2+/AM3)

Take note of the appropriate screw holes needed for mounting your specific socket as illustrated below.

Mount the backplate screws (N2) making sure the insulation pads (W2) are placed in between the screws and the motherboard.

For AM2/AM3 installations-mount the screws (B2) to the backplate as illustrated below

Backplate Screws

N2

MotherBoard

W2

B2


AM2/AM3 Bracket

Cooler Installation


Step 1
Apply the included thermal compound evenly over the CPU surface.




Step 2
Remove the film from the bottom of the CPU cooler.

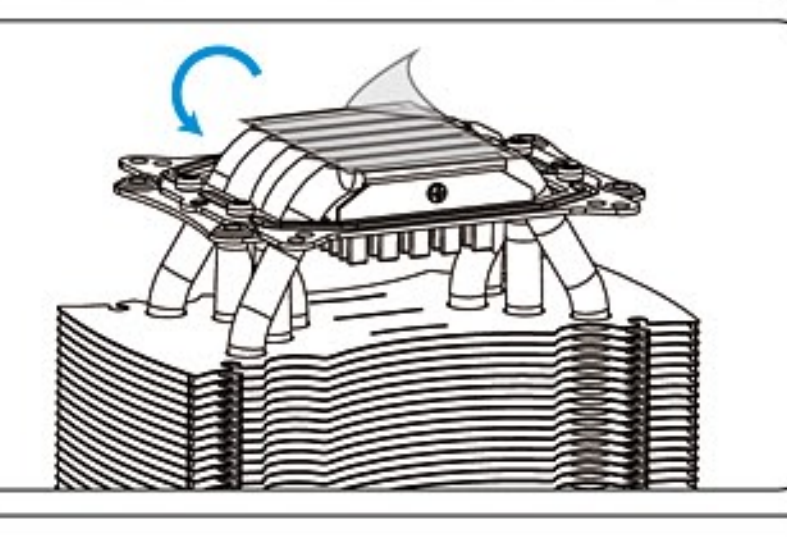

Step 3
Position the CPU cooler directly over the processor lining up the mounting brackets with the retention clips on the motherboard. Use insulation pads (W3) after the cooler is mounted and secure the cooler with the spring loaded screws.

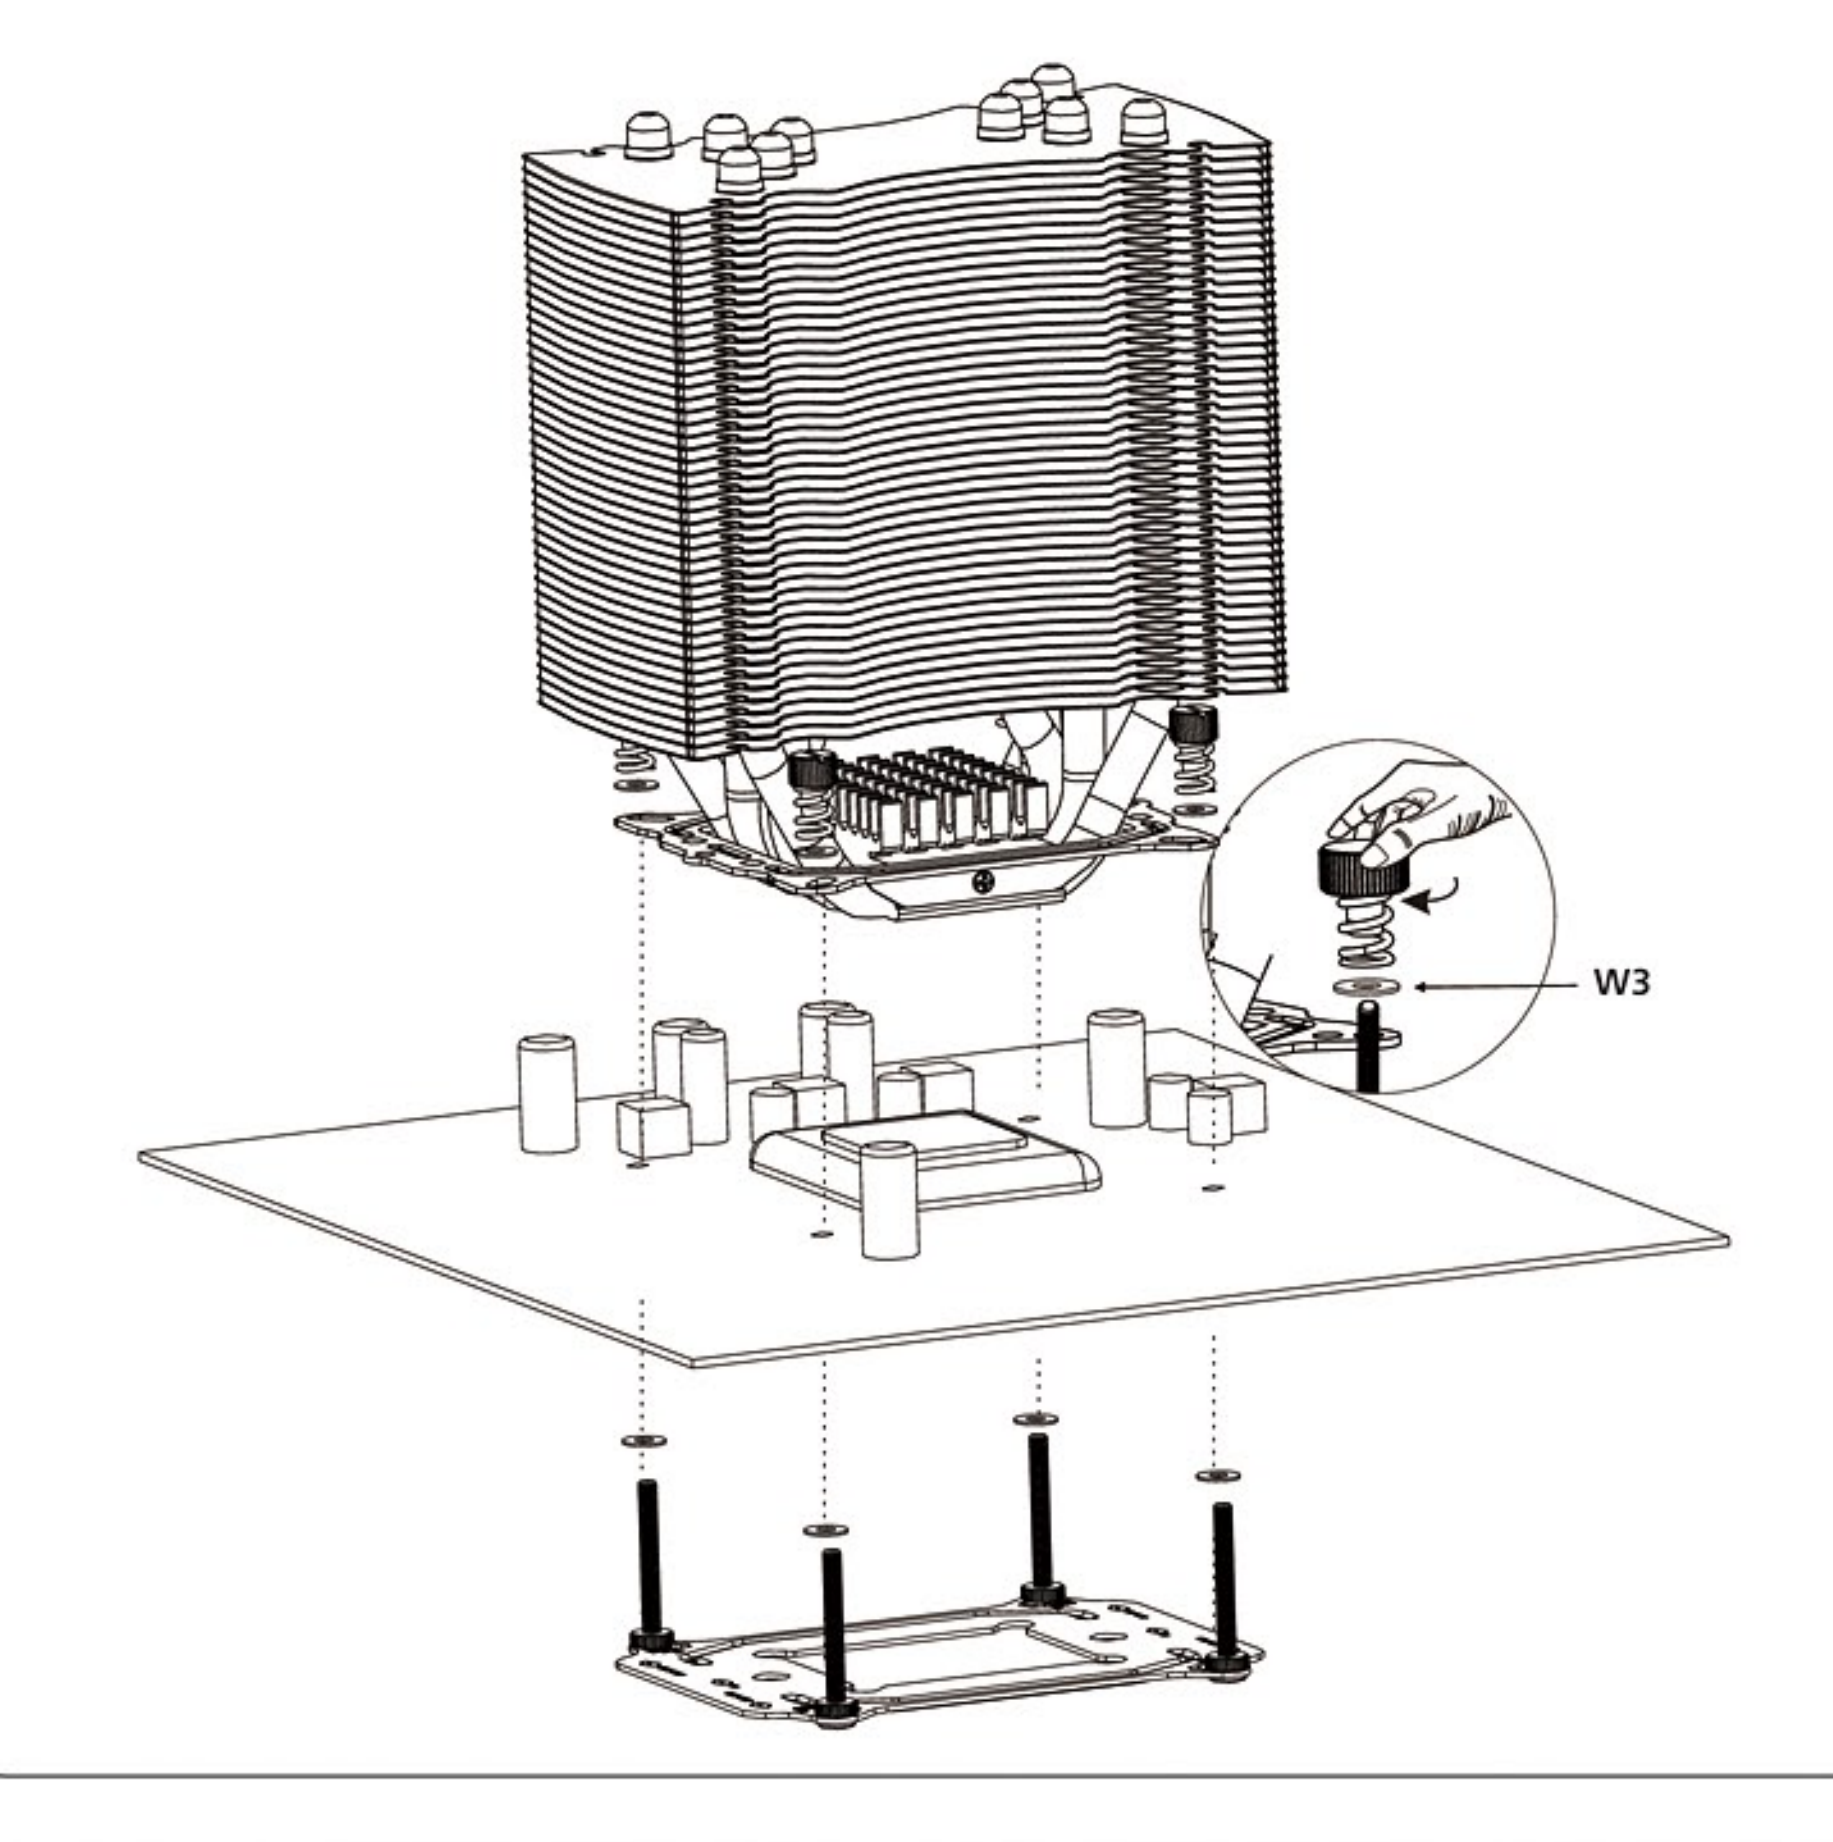


Step 4
Wiggle the CPU cooler to ensure it is sufficiently locked in. There should be minimal play in the cooler after it has been installed.

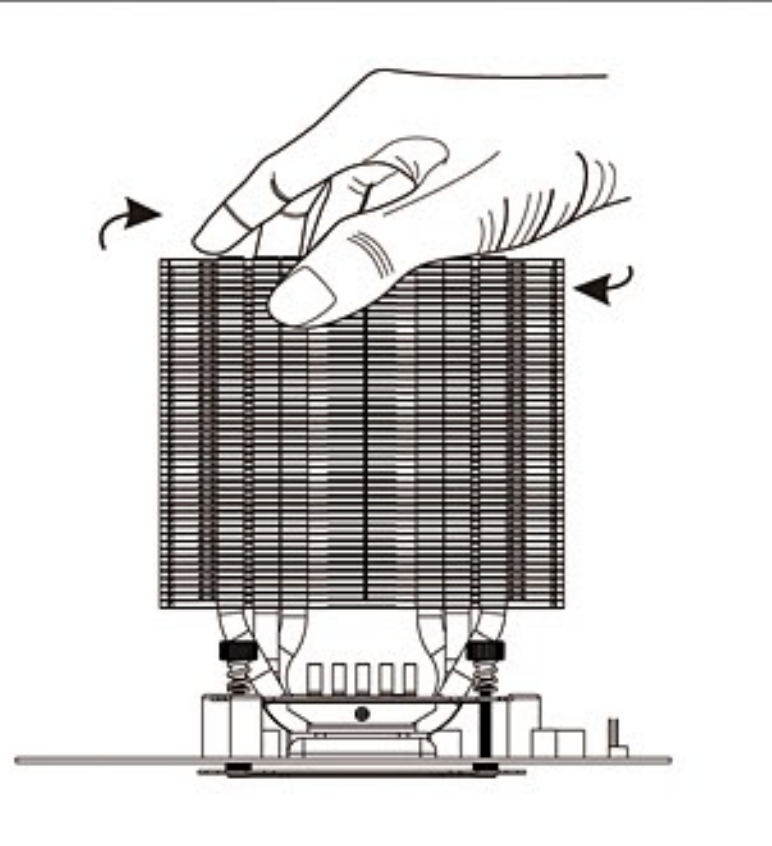

Fan Installation

1. Slide the rubber fan mounts into all four corners of the CPU cooler
2. Pull the ends of the rubber fan mounts through the fans screw holes.

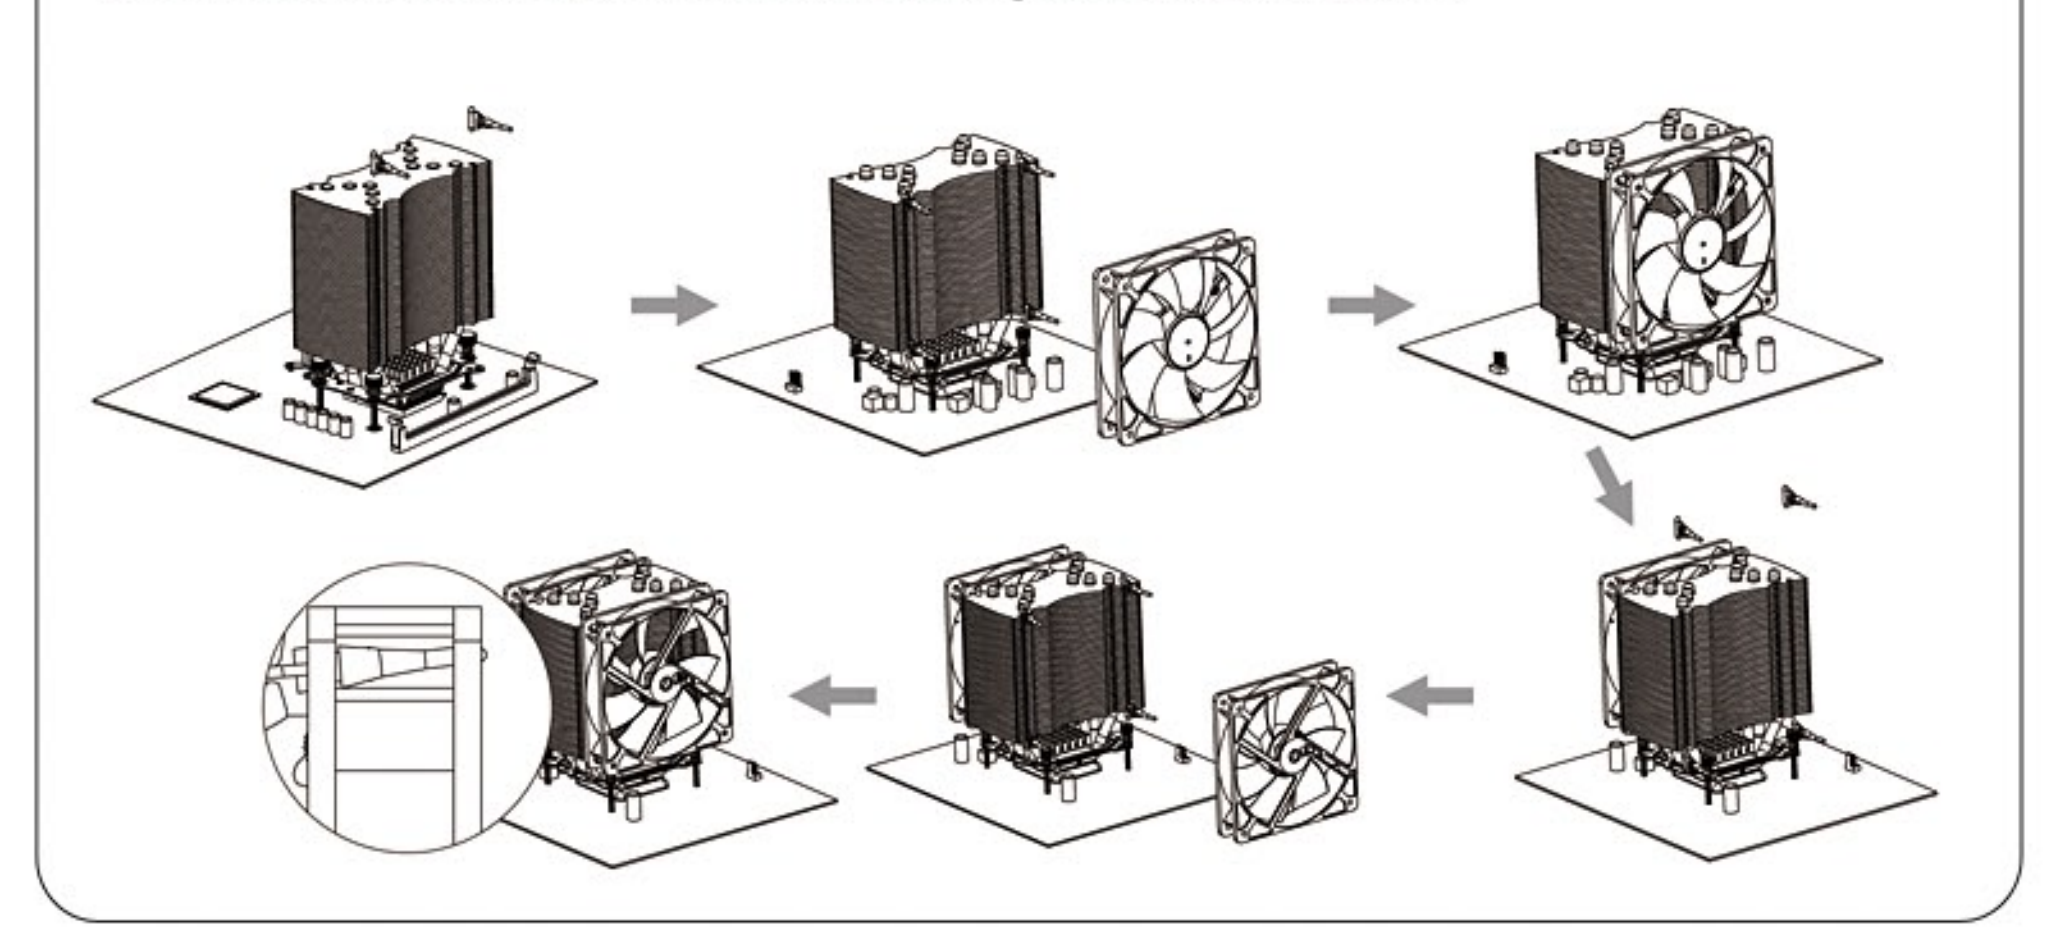


Installation

Contenu de paquet



Préinstallation

Plaque arrière

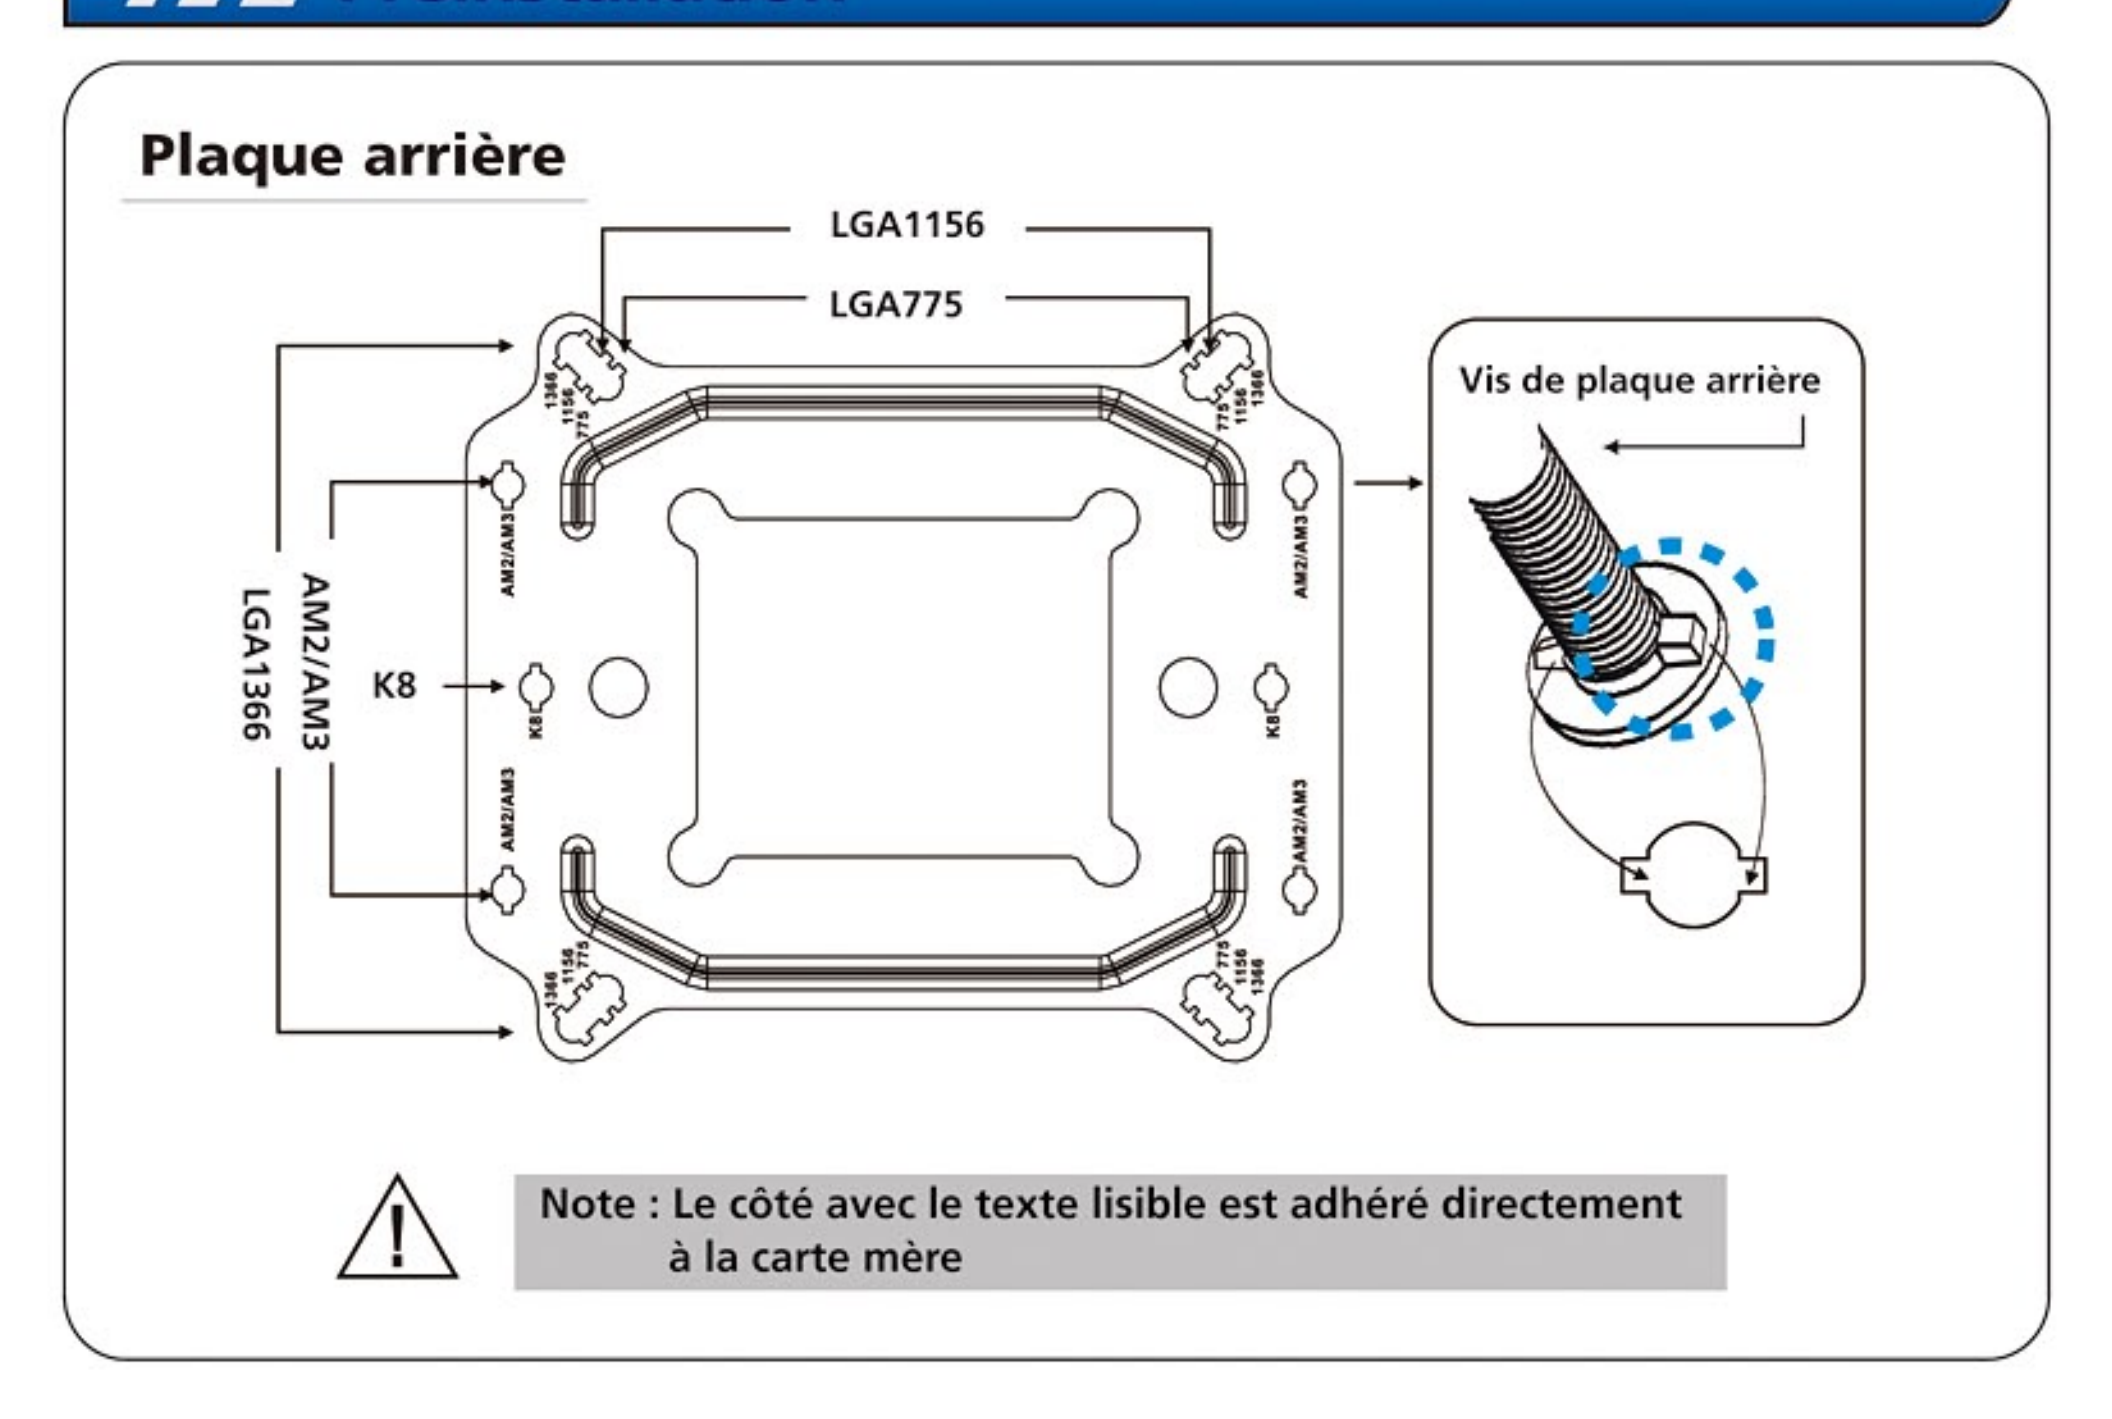


Note : Le côté avec le texte lisible est adhéré directement à la carte mère

Installation d'Intel (Sockets LGA 775/1156/1366)

Notez les trous appropriés de vis requis pour monter votre douille spécifique comme illustré ci-dessous.

Montez les vis de plaque arrière (N1) veillant les garnitures d'isolation (W1) sont placés entre les vis et la carte mère.

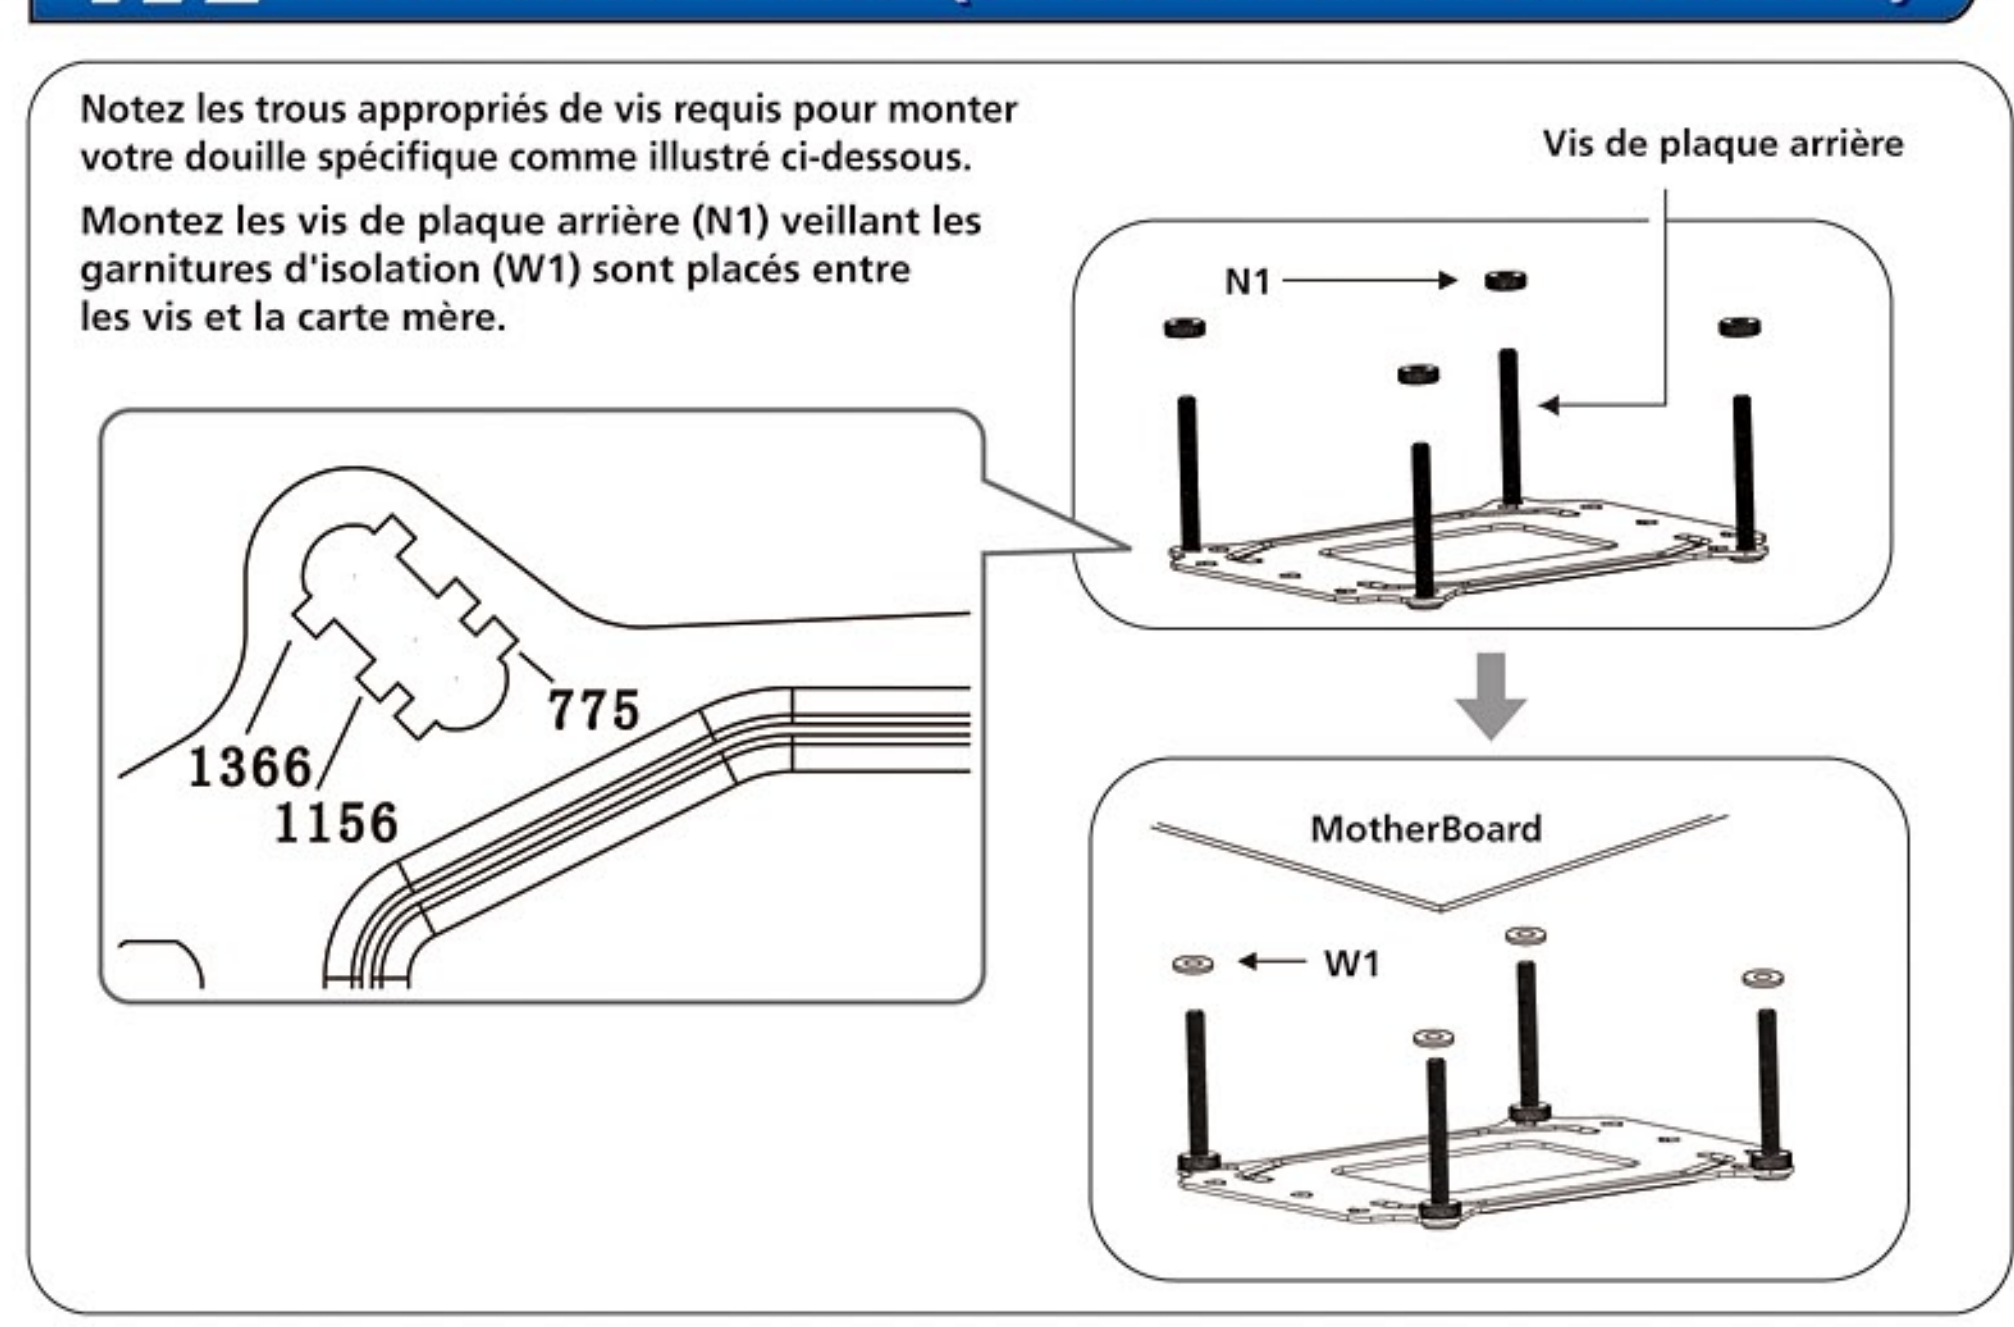

Installation d'AMD (Sockets AM2/AM2+/AM3)

Notez les trous appropriés de vis requis pour monter votre douille spécifique comme illustré ci-dessous.

Montez les vis de plaque arrière (N2) veillant les garnitures d'isolation (W2) sont placés entre les vis et la carte mère.

Pour AM2/AM3 installation-montez les vis (B2) à la plaque arrière comme illustré ci-dessous

Vis de plaque arrière
N2
MotherBoard
W2
B2
AM2/AM3 Bracket

Installation plus fraîche


Étape 1

Appliquez le composé thermique inclus même au-dessus de la surface CPU.




Étape 2

Enlevez le film du fond du refroidisseur CPU.

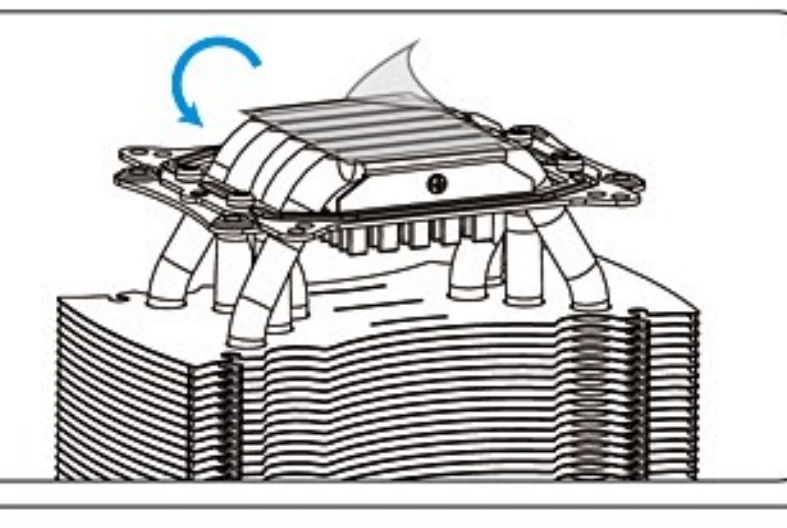


Étape 3

Placez le refroidisseur CPU directement au-dessus du processeur alignant les supports avec les agrafes de conservation sur la carte mère. Les garnitures d'isolation d'utilisation (W3) après que le refroidisseur soit monté et fixent le refroidisseur avec les vis à ressort.

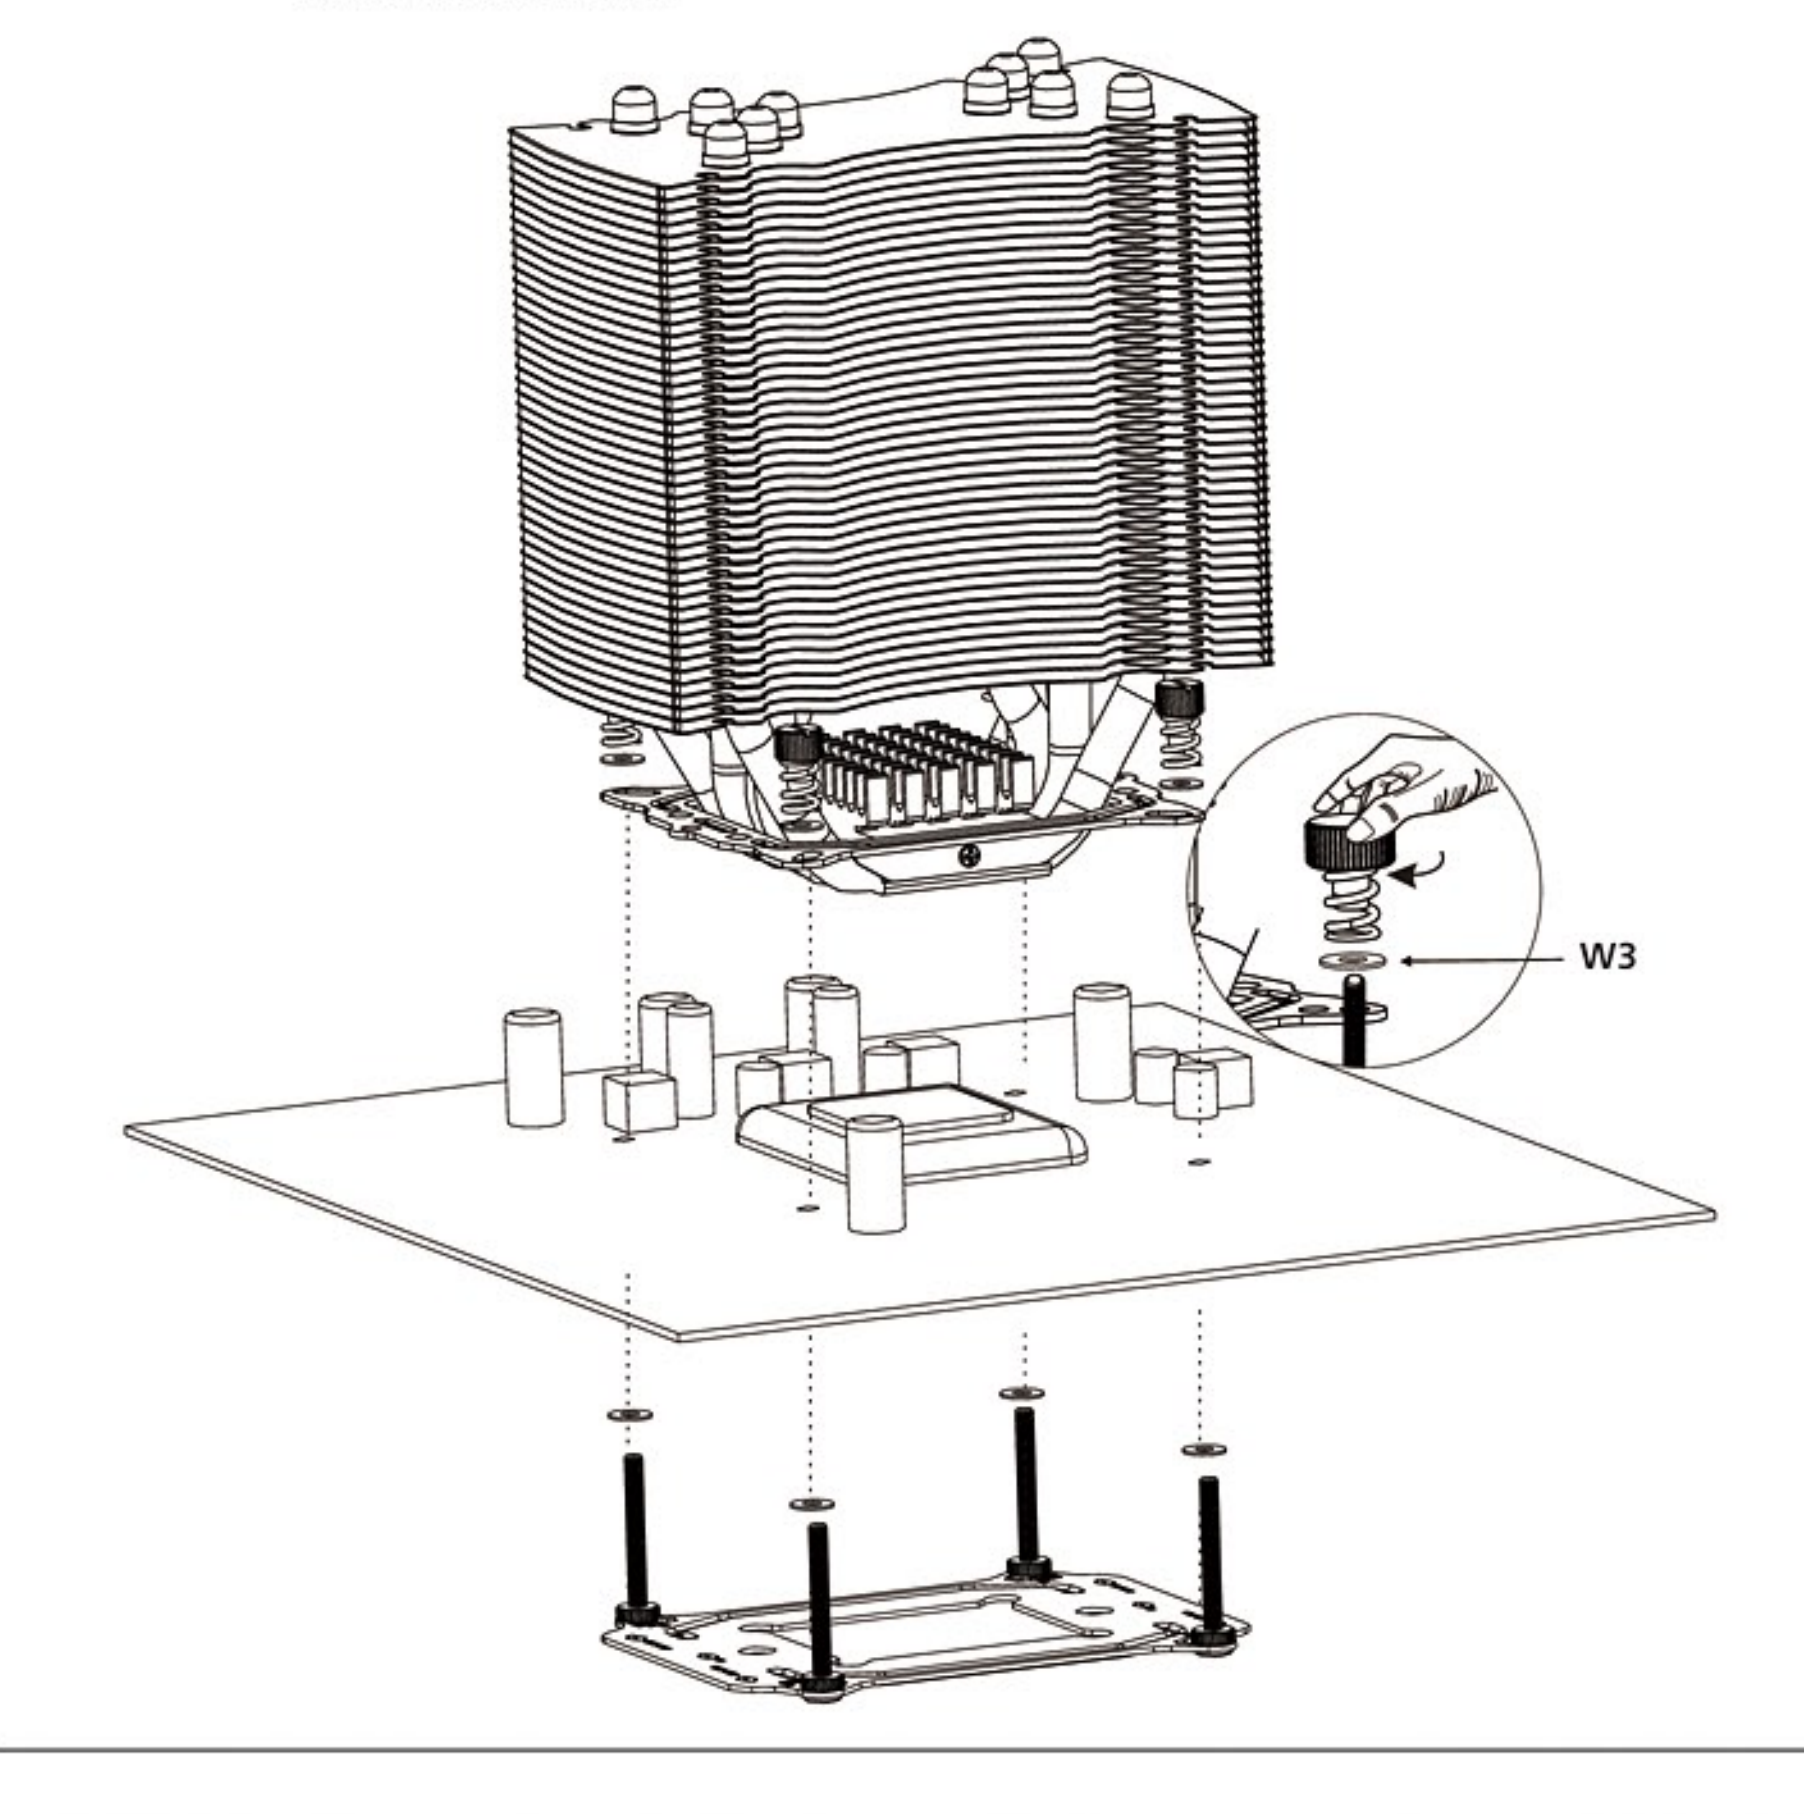

Étape 4

Agitez le refroidisseur CPU pour s'assurer qu'il est suffisamment fermé à clef dedans. Il devrait y avoir jeu minimal dans le refroidisseur après qu'il ait été installé.

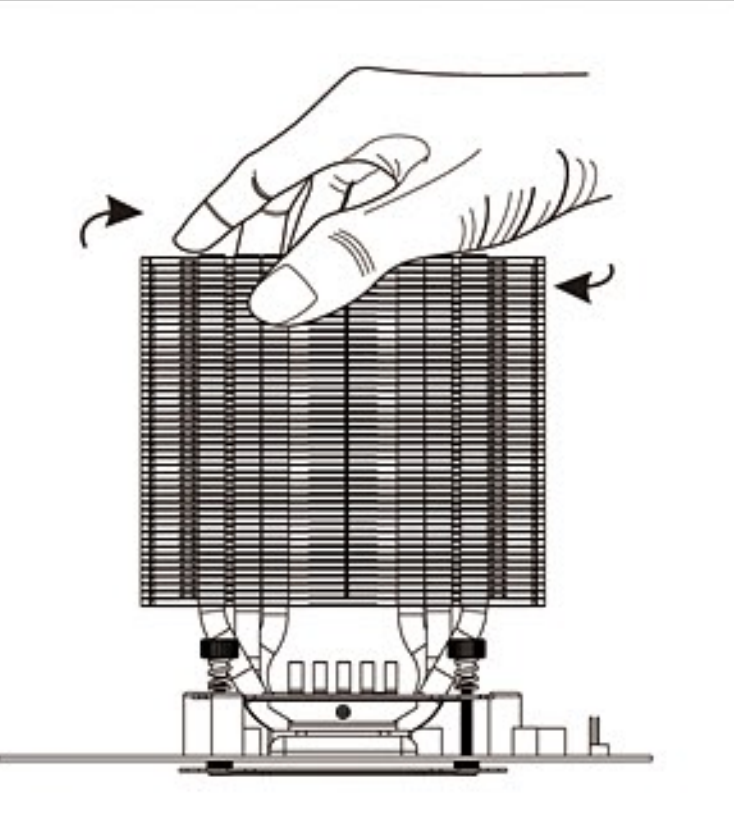

Installation de ventilateur

1. Glissez les bâtis en caoutchouc de ventilateur dans chacun des quatre coins du refroidisseur CPU.
2. Tirez les extrémités des bâtis en caoutchouc de ventilateur par les trous de vis de ventilateurs.

